


In-Line Connector C220

<http://www.lt1swap.co>

(10 cavities, White) IP to engine harness, under the right side of the IP, behind the knee l

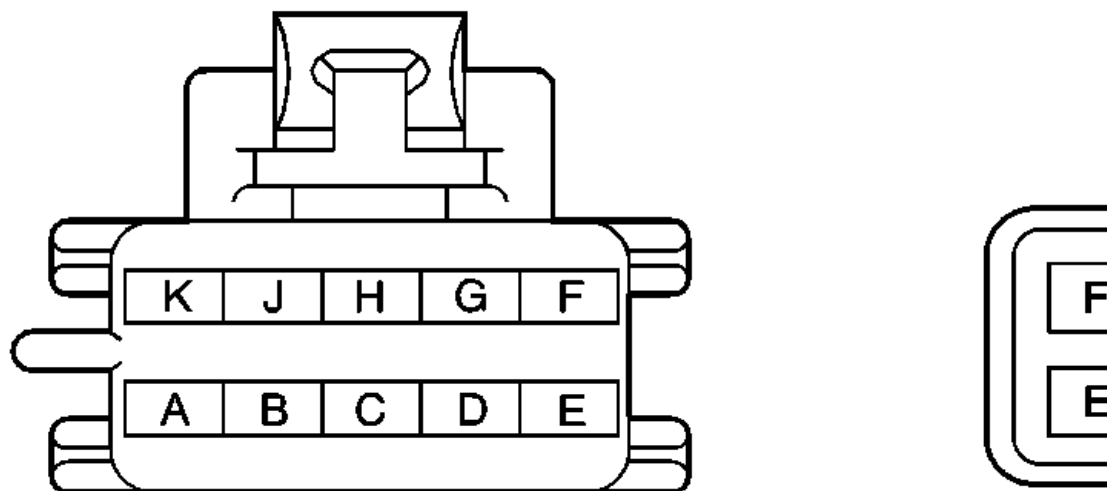


Connector Part
Information

1206-4769
10-Way F Metri-pack 150 Series (WHT)

Cor
Infc

Pin	Wire Color	Circuit No.	Function	Pin
A	TAN	31	Oil Pressure Indicator Lamp Output	A
B	GRY	48 (With MM6/M49)	Clutch Switch Signal - Clutch Anticipate	B
C	PNK	539 (With M30)	Fused Output - Ignition	C
D	PPL	420 (With M30)	Brake Pedal Switch Output - Torque Converter Clutch	D
E	BLK/WHT	451	Ground	E
F	ORN/BLK	1061 (V6 VIN K)	UART Serial Data Signal	F
G	BRN	141 (With MM6/M49)	Fused Output - Ignition	G
H	ORN/BLK	434 (With M30)	Transmission Mounted Neutral Safety Switch Signal	H
H	LT GRN	24 (With MM6/M49)	Backup Lamp Feed	H
J	YEL/BLK	625	Vehicle Anti-Theft System Starter Enable Relay Output - Coil	J
K	DK GRN/WHT	817	Vehicle Speed Signal-4000 Pulses per Mile	K

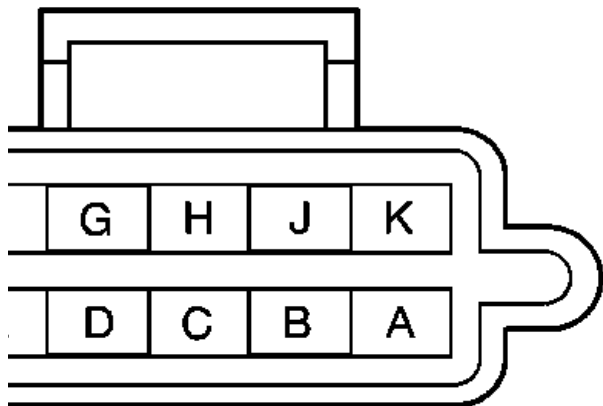

Connector Part Information 1206-4770
 10-Way M Metri-pack 150 Series (WHT)

Wire Color	Circuit No.	Function
TAN	31	Oil Pressure Indicator Lamp Output
GRY	48 (With MM6/M49)	Clutch Switch Signal - Clutch Anticipate
PNK	539 (With M30)	Fused Output - Ignition
PPL	420 (With M30)	Brake Pedal Switch Output - Torque Converter Clutch
BLK/WHT	451	Ground
ORN/BLK	1061 (V6 VIN K)	UART Serial Data Signal
BRN	141 (With MM6/M49)	Fused Output - Ignition
ORN/BLK	434 (With M30)	Transmission Mounted Neutral Safety Switch Signal
LT GRN	24 (With MM6/M49)	Backup Lamp Feed
YEL/BLK	625	Vehicle Anti-Theft System Starter Enable Relay Output - Coil
DK GRN/WHT	817	Vehicle Speed Signal-4000 Pulses per Mile