




DYNOJET Performance Evaluation Program

DYNOJET RESEARCH
FBI - 28691 Arnold Dr Sonoma CA 95476 - 415-205-2222

CF: SAE Smoothing: 5

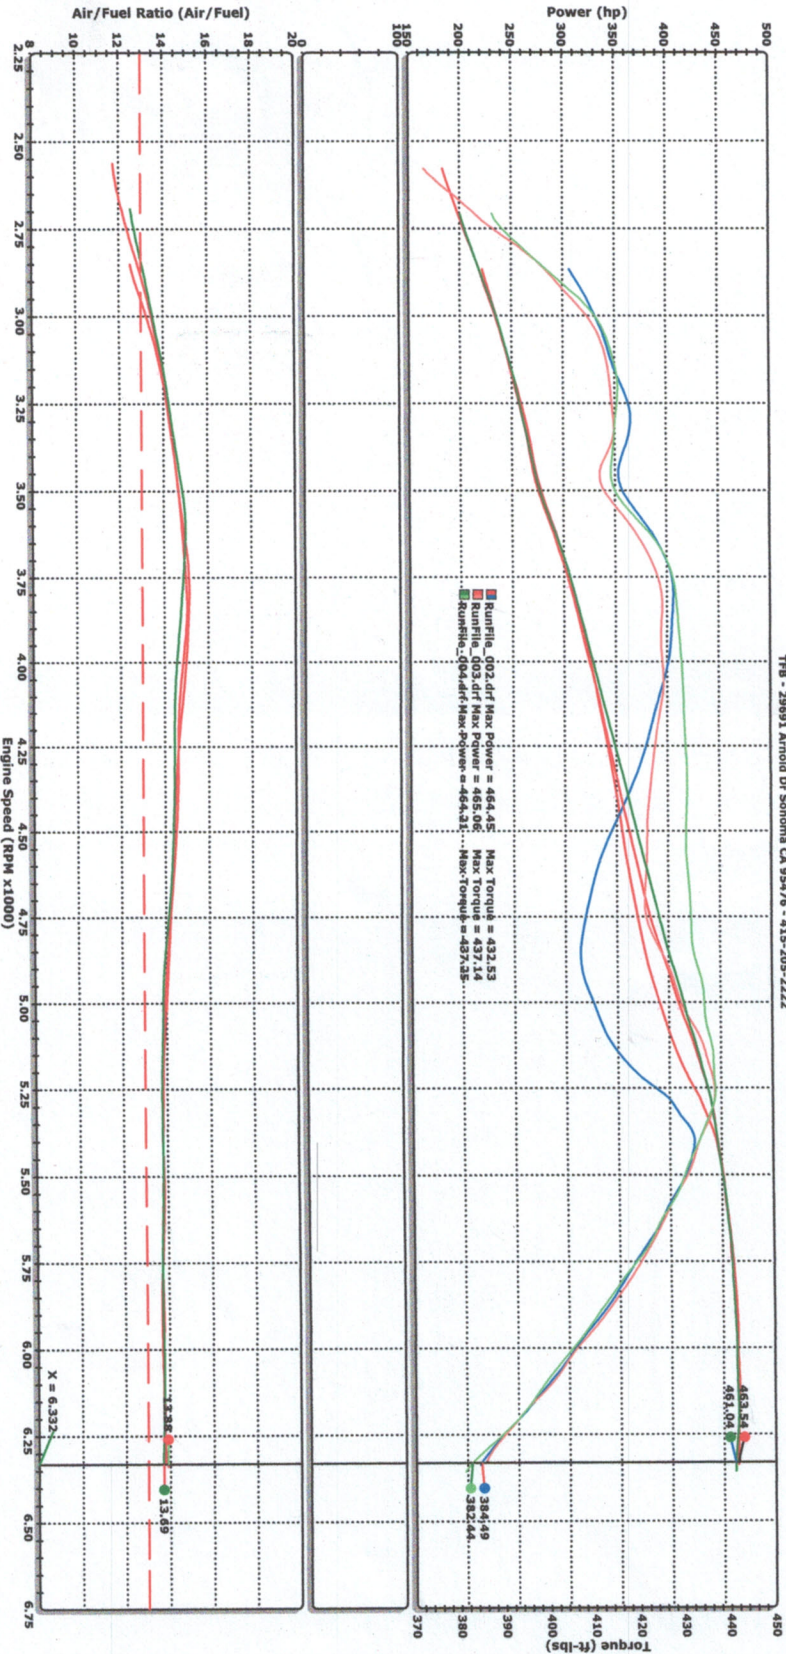

- RunFile_002.drf - 3/14/2019 2:38:09 PM Run Type: RO Run Conditions: 72.92 F, 29.48 in-Hg, Humidity: 15%, SAE: 0.99
Max Power = 464.45 Max Torque = 432.53
- RunFile_003.drf - 3/14/2019 2:38:54 PM Run Type: RO Run Conditions: 72.91 F, 29.48 in-Hg, Humidity: 16%, SAE: 0.99
Max Power = 466.06 Max Torque = 437.14
- RunFile_004.drf - 3/14/2019 2:39:23 PM Run Type: RO Run Conditions: 72.96 F, 29.48 in-Hg, Humidity: 16%, SAE: 0.99
Max Power = 464.21 Max Torque = 437.25

S	RPM	x1000	hp	ft-lbs	Air/Fuel
0.22	2.55	185.67	N/A	N/A	11.72
0.29	2.60	185.67	N/A	375.08	11.82
0.36	2.65	191.60	191.60	379.71	11.97
0.42	2.70	197.47	197.47	384.10	12.17
0.49	2.75	203.56	203.56	388.74	12.38
0.55	2.80	210.20	210.20	394.23	12.61
0.61	2.85	216.56	216.56	399.06	12.85
0.67	2.90	222.38	222.38	402.72	13.08
0.73	2.95	228.18	228.18	406.21	13.29
0.79	3.00	233.95	233.95	409.55	13.47
0.85	3.05	239.24	239.24	411.95	13.63
0.91	3.10	243.98	243.98	413.36	13.78
0.97	3.15	248.42	248.42	414.19	13.92
1.03	3.20	252.64	252.64	414.66	14.04
1.08	3.25	256.81	256.81	415.01	14.15
1.14	3.30	261.02	261.02	415.43	14.26
1.20	3.35	264.85	264.85	415.23	14.37
1.27	3.40	267.79	267.79	413.68	14.48
1.33	3.45	270.83	270.83	412.30	14.58
1.39	3.50	275.42	275.42	413.28	14.67
1.44	3.55	281.21	281.21	416.01	14.74
1.49	3.60	287.23	287.23	419.01	14.81
1.54	3.65	292.97	292.97	421.55	14.87
1.59	3.70	298.39	298.39	423.55	14.93
1.64	3.75	303.52	303.52	425.08	14.98
1.69	3.80	308.18	308.18	425.94	15.02
1.73	3.85	312.30	312.30	426.04	15.03
1.78	3.90	316.18	316.18	425.81	15.00
1.83	3.95	320.24	320.24	425.80	14.93
1.87	4.00	324.52	324.52	426.09	14.84
1.92	4.05	328.73	328.73	426.30	14.76
1.96	4.10	332.59	332.59	426.06	14.70
2.01	4.15	336.16	336.16	425.44	14.65
2.05	4.20	339.68	339.68	424.78	14.62
2.09	4.25	343.29	343.29	424.24	14.61
2.13	4.30	346.97	346.97	423.80	14.60
2.17	4.35	350.64	350.64	423.36	14.60
2.21	4.40	354.31	354.31	422.93	14.58
2.25	4.45	358.05	358.05	422.60	14.55
2.29	4.50	361.93	361.93	422.43	14.50
2.33	4.55	365.90	365.90	422.36	14.45
2.37	4.60	369.81	369.81	422.24	14.39
2.41	4.65	373.61	373.61	421.99	14.33
2.45	4.70	377.45	377.45	421.80	14.27
2.50	4.75	381.75	381.75	422.10	14.21
2.55	4.80	386.93	386.93	423.36	14.15
2.60	4.85	392.80	392.80	425.35	14.09
2.66	4.90	398.57	398.57	427.21	14.03
2.73	4.95	403.84	403.84	428.48	13.98
2.79	5.00	409.14	409.14	429.77	13.93
2.87	5.05	415.13	415.13	431.74	13.90
2.94	5.10	421.31	421.31	433.87	13.86
3.03	5.15	426.76	426.76	435.22	13.84
3.12	5.20	432.00	432.00	436.32	13.82
3.20	5.25	436.94	436.94	437.11	13.82
3.29	5.30	440.76	440.76	436.78	13.81
3.39	5.35	443.59	443.59	435.47	13.79
3.48	5.40	445.84	445.84	433.64	13.79
3.56	5.45	448.70	448.70	432.41	13.78
3.63	5.50	451.23	451.23	430.90	13.78
3.71	5.55	453.00	453.00	428.69	13.77
3.78	5.60	454.93	454.93	426.67	13.76
3.86	5.65	456.97	456.97	424.79	13.74

AX:	IN:				
3.94	4.88	6.30	465.05	437.11	15.03
4.01	0.22	2.55	185.67	375.08	11.72
4.09					
4.16					
4.24					
4.32					
4.40					
4.47					
4.55					
4.63					
4.71					
4.79					
4.88					
5.70					
5.75					
5.80					
5.85					
5.90					
5.95					
6.00					
6.05					
6.10					
6.15					
6.20					
6.25					
6.30					
458.66					
460.19					
461.58					
462.59					
463.39					
463.78					
463.81					
464.51					
465.05					
464.52					
464.13					
463.87					
463.88					
422.63					
420.35					
417.98					
415.32					
412.51					
409.39					
406.01					
403.25					
400.42					
396.71					
393.18					
389.81					
386.73					
13.72					
13.71					
13.72					
13.74					
13.75					
13.75					
13.74					
13.73					
13.73					
13.73					
13.74					