

Thread Repair Specifications

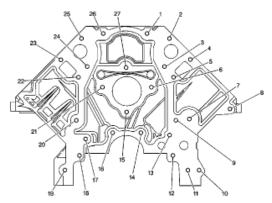

Engine Block

				Engine Blo	ck – Fron	t View		
Hole	Thread Size	Insert	Drill	Counterbore Tool	Тар	Driver	Drill Depth – Maximum mm (in)	Tap Depth – Maximum mm (in)
1–6	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	22.5 (0.885)	17.5 (0.688)
7	M10 x 1.5	J 42385- 215	J 42385- 211	J 42385-212	J 42385- 213	J 42385- 214	25.0 (0.984)	19.5 (0.767)
8	M10 x 1.5	J 42385- 215	J 42385- 211	J 42385-212	J 42385- 213	J 42385- 214	32.5 (1.28)	25.0 (0.984)
9	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	22.5 (0.885)	17.5 (0.688)
10	M10 x 1.5	J 42385- 215	J 42385- 211	J 42385-212	J 42385- 213	J 42385- 214	Thru	Thru
11– 13	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	22.5 (0.885)	17.5 (0.688)
14	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	Thru	18.0 (0.708)
15	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	22.5 (0.885)	17.5 (0.688)
16	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	Thru	18.0 (0.708)
17– 27	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	22.5 (0.885)	17.5 (0.688)


Engine Block - Front View

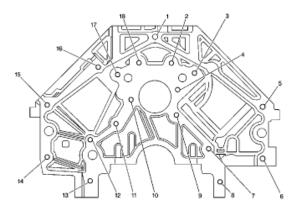

Engine Block

				Engine Blo	ck – Rear	View		
Hole	Thread Size	Insert	Drill	Counterbore Tool	Тар	Driver	Drill Depth – Maximum mm (in)	Tap Depth – Maximum mm (in)
1	M10 x 1.5	J 42385- 215	J 42385- 211	J 42385-212	J 42385- 213	J 42385- 214	27.0 (1.06)	21.5 (0.846)
2–4	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	22.5 (0.885)	17.5 (0.688)
5–6	M10 x 1.5	J 42385- 215	J 42385- 211	J 42385-212	J 42385- 213	J 42385- 214	27.0 (1.06)	21.5 (0.846)
7–13	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	22.5 (0.885)	17.5 (0.688)
14– 16	M10 x 1.5	J 42385- 215	J 42385- 211	J 42385-212	J 42385- 213	J 42385- 214	27.0 (1.06)	21.5 (0.846)
17– 18	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	22.5 (0.885)	17.5 (0.688)

Engine Block - Rear View

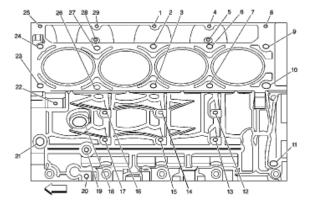


Engine Block

				Engine Block	– Left Sid	de View		
Hole	Thread Size	Insert	Drill	Counterbore Tool	Тар	Driver	Drill Depth – Maximum mm (in)	Tap Depth – Maximum mm (in)
1	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	26.5 (1.04)	19.0 (0.784)
2-3	M11 x 2.0	J 42385- 108	J 42385- 105	ı	J 42385- 106	J 42385- 107	69.0 (2.72)	60.0 (2.36)
4	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	26.5 (1.04)	19.0 (0.784)
5	M6 x 1.0	J 42385- 205	J 42385- 201	J 42385-202	J 42385- 203	J 42385- 204	22.5 (0.885)	16.0 (0.629)
6–7	M11 x 2.0	J 42385- 108	J 42385- 105	I	J 42385- 106	J 42385- 107	69.0 (2.72)	60.0 (2.36)
8	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	26.5 (1.04)	19.0 (0.784)
9	M11 x 2.0	J 42385- 108	J 42385- 105	I	J 42385- 106	J 42385- 107	69.0 (2.72)	60.0 (2.36)
10	M11 x 2.0	J 42385- 108	J 42385- 105	ı	J 42385- 106	J 42385- 107	69.0 (2.72)	60.0 (2.36)
11	M16 x 1.5	_	-	_	-	-	_	_
12- 17	M10 x 1.5	J 42385- 215	J 42385- 211	J 42385-212	J 42385- 213	J 42385- 214	29.0 (1.14)	23.0 (0.905)
18	M28 x 1.25	1	-	-	ı	1	-	-
19– 20	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	21.0 (0.826)	16.0 (0.629)
21	M16 x 1.5	-	1	1	ı	1	-	-
22	M10 x 1.5	J 42385- 215	J 42385- 211	J 42385-212	J 42385- 213	J 42385- 214	27.0 (1.06)	21.5 (0.846)
23	M11 x 2.0	J 42385- 108	J 42385- 105	-	J 42385- 106	J 42385- 107	69.0 (2.72)	60.0 (2.36)
24	M11 x 2.0	J 42385- 108	J 42385- 105	-	J 42385- 106	J 42385- 107	69.0 (2.72)	60.0 (2.36)
25	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	26.5 (1.04)	19.0 (0.784)

	Engine Block – Left Side View										
Hole	Thread Size	Insert	Drill	Counterbore Tool	Тар	Driver	Drill Depth – Maximum mm (in)	Tap Depth – Maximum mm (in)			
26- 27	M11 x 2.0	J 42385- 108	J 42385- 105	-	J 42385- 106	J 42385- 107	69.0 (2.72)	60.0 (2.36)			
28	M6 x 1.0	J 42385- 205	J 42385- 201	J 42385-202	J 42385- 203	J 42385- 204	22.5 (0.885)	16.0 (0.629)			
29	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	26.5 (1.04)	19.0 (0.784)			

Bolt holes 2, 3, 6, 7, 9, 10, 23, 24, 26, and 27 have a 30 mm (1.18 in) counterbore included in the 69.0 mm (2.72 in) drill depth. Use sleeve J 42385–315 with the drill and tap.

Engine Block - Left Side View

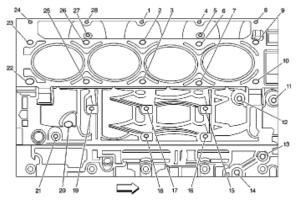


Engine Block

	Engine Block - Right Side View										
Hole	Thread Size	Insert	Drill	Counterbore Tool	Тар	Driver	Drill Depth – Maximum mm (in)	Tap Depth – Maximum mm (in)			
1	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	26.5 (1.04)	19.0 (0.784)			
2–3	M11 x 2.0	J 42385- 108	J 42385- 105	1	J 42385- 106	J 42385- 107	69.0 (2.72)	60.0 (2.36)			
4	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	26.5 (1.04)	19.0 (0.784)			
5	M6 x 1.0	J 42385- 205	J 42385- 201	J 42385-202	J 42385- 203	J 42385- 204	22.5 (0.885)	15.0 (0.590)			
6–7	M11 x 2.0	J 42385- 108	J 42385- 105	-	J 42385- 106	J 42385- 107	69.0 (2.72)	60.0 (2.36)			
8	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	26.5 (1.04)	19.0 (0.784)			
9	M11 x 2.0	J 42385- 108	J 42385- 105	ı	J 42385- 106	J 42385- 107	69.0 (2.72)	60.0 (2.36)			
10	M11 x 2.0	J 42385- 108	J 42385- 105	-	J 42385- 106	J 42385- 107	69.0 (2.72)	60.0 (2.36)			
11– 14	M10 x 1.5	J 42385- 215	J 42385- 211	J 42385-212	J 42385- 213	J 42385- 214	27.0 (1.06)	21.5 (0.846)			
15– 19	M10 x 1.5	J 42385- 215	J 42385- 211	J 42385-212	J 42385- 213	J 42385- 214	29.0 (1.14)	23.0 (0.905)			
20	M16 x 1.5	_	-	_	-		_	-			
21	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	22.5 (0.885)	17.5 (0.688)			
22	M11 x 2.0	J 42385- 108	J 42385- 105	-	J 42385- 106	J 42385- 107	69.0 (2.72)	60.0 (2.36)			
23	M11 x 2.0	J 42385- 108	J 42385- 105	-	J 42385- 106	J 42385- 107	69.0 (2.72)	60.0 (2.36)			
24	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	26.5 (1.04)	19.0 (0.784)			
25- 26	M11 x 2.0	J 42385- 108	J 42385- 105	_	J 42385- 106	J 42385- 107	69.0 (2.72)	60.0 (2.36)			
27	M6 x 1.0	J 42385-	J 42385-	J 42385-202	J 42385-	J 42385-	22.5 (0.885)	15.0 (0.590)			

	Engine Block - Right Side View									
Hole	Hole Size Insert Drill Tool Tap Driver (in) Tap Depth Maximum mm Maximum m									
		205	201		203	204				
28	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	26.5 (1.04)	19.0 (0.784)		

Bolt holes 2, 3, 6, 7, 9, 10, 22, 23, 25, and 26 have a 30 mm (1.18 in) counterbore included in the 69.0 mm (2.72 in) drill depth. Use sleeve J 42385–315 with the drill and tap.

Engine Block - Right Side View

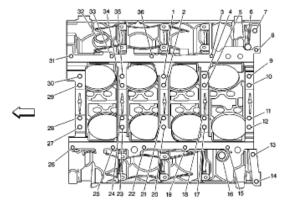

Engine Block

	Engine Block – Bottom View											
Hole	Thread Size	Insert	Drill	Counterbore Tool	Тар	Driver	Drill Depth – Maximum mm (in)	Tap Depth – Maximum mm (in)				
1	M10 x 2.0	J 42385- 104	J 42385- 101	_	J 42385- 102	J 42385- 103	31.0 (1.22)	25.5 (1.0)				
2	M10 x 2.0	J 42385- 104	J 42385- 101	_	J 42385- 102	J 42385- 103	53.5 (2.10)	44.0 (1.73)				
3	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	22.5 (0.885)	17.5 (0.688)				
4	M10 x 2.0	J 42385- 104	J 42385- 101	_	J 42385- 102	J 42385- 103	31.0 (1.22)	25.5 (1.0)				
5	M10 x 2.0	J 42385- 104	J 42385- 101	_	J 42385- 102	J 42385- 103	53.5 (2.10)	44.0 (1.73)				
6	M16 x 1.5	_	_	-	_	_	_	_				
7	N/A	_	_	_	_	_		-				
8	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	22.5 (0.885)	17.5 (0.688)				
9	M10 x 2.0	J 42385- 104	J 42385- 101	_	J 42385- 102	J 42385- 103	31.0 (1.22)	25.5 (1.0)				
10- 11	M10 x 2.0	J 42385- 104	J 42385- 101	_	J 42385- 102	J 42385- 103	53.5 (2.10)	44.0 (1.73)				
12	M10 x 2.0	J 42385- 104	J 42385- 101	_	J 42385- 102	J 42385- 103	31.0 (1.22)	25.5 (1.0)				
13– 14	M10 x 1.5	J 42385- 215	J 42385- 101	-	J 42385- 213	J 42385- 214	42.5 (1.67)	37.0 (1.45)				
15	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	22.5 (0.885)	17.5 (0.688)				
16	M16 x 1.5	_	_	_	_	_	_	_				
17	M10 x 2.0	J 42385- 104	J 42385- 101	_	J 42385- 102	J 42385- 103	53.5 (2.10)	44.0 (1.73)				
18	M10 x 2.0	J 42385- 104	J 42385- 101	-	J 42385- 102	J 42385- 103	31.0 (1.22)	25.5 (1.0)				
19	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	22.5 (0.885)	17.5 (0.688)				
20	M10 x 2.0	J 42385- 104	J 42385- 101	_	J 42385- 102	J 42385- 103	53.5 (2.10)	44.0 (1.73)				
21	M10 x 2.0	J 42385- 104	J 42385- 101	_	J 42385- 102	J 42385- 103	31.0 (1.22)	25.5 (1.0)				
22	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	22.5 (0.885)	17.5 (0.688)				
23	M10 x 2.0	J 42385- 104	J 42385- 101	_	J 42385- 102	J 42385- 103	31.0 (1.22)	25.5 (1.0)				
24	M10 x 2.0	J 42385- 104	J 42385- 101	_	J 42385- 102	J 42385- 103	53.5 (2.10)	44.0 (1.73)				
25– 26	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	22.5 (0.885)	17.5 (0.688)				
27	M10 x	J 42385-	J 42385-	_	J 42385-	J 42385-	31.0 (1.22)	25.5 (1.0)				


				Engine Block	– Botton	n View		
Hole	Thread Size	Insert	Drill	Counterbore Tool	Тар	Driver	Drill Depth – Maximum mm (in)	Tap Depth – Maximum mm (in)
	2.0	104	101		102	103		
28- 29	M10 x 2.0	J 42385- 104	J 42385- 101	-	J 42385- 102	J 42385- 103	53.5 (2.10)	44.0 (1.73)
30	M10 x 2.0	J 42385- 104	J 42385- 101	_	J 42385- 102	J 42385- 103	31.0 (1.22)	25.5 (1.0)
31	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	22.5 (0.885)	17.5 (0.688)
32	M28 x 1.25	-	1	-	_	1	-	-
33	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	22.5 (0.885)	17.5 (0.688)
34	M10 x 2.0	J 42385- 104	J 42385- 101	_	J 42385- 102	J 42385- 103	53.5 (2.10)	44.0 (1.73)
35	M10 x 2.0	J 42385- 104	J 42385- 101	_	J 42385- 102	J 42385- 103	31.0 (1.22)	25.5 (1.0)
36	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	22.5 (0.885)	17.5 (0.688)

- Bolt holes 2, 5, 10, 11, 18, 21, 24, 28, 29, and 34 have a 20.5 mm (0.807 in) counterbore included in the 53.5 mm (2.10 in) drill depth.

 Bolt holes 1, 4, 9, 12, 17, 20, 23, 27, 30, and 35 have a 1.5 mm (0.059 in) counterbore included in the 31.0 mm (1.22 in) drill depth. Use sleeve J 42385-316 with the drill and tap.

 Bolt holes 13 and 14 have a 11.5 mm (0.452 in) counterbore included in the 42.5 mm (1.67 in) drill depth. Use sleeve J 42385-311 with the drill and tap.


Engine Block - Bottom View

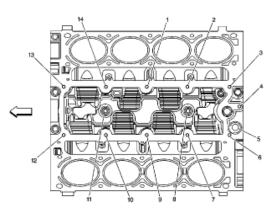

Engine Block

				Engine Blo	ck – Top	View		
Hole	Thread Size	Insert	Drill	Counterbore Tool	Тар	Driver	Drill Depth – Maximum mm (in)	Tap Depth – Maximum mm (in)
1–4	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	26.5 (1.04)	19.0 (0.784)
5	M16 x 1.5			ı	ı	ı	ı	_
6–7	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	26.5 (1.04)	19.0 (0.784)
8	M10 x 1.5	J 42385- 216	J 42385- 211	J 42385-212	J 42385- 213	J 42385- 214	22.5 (0.885)	17.0 (0.669)
9–10	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	26.5 (1.04)	19.0 (0.784)
11	M10 x 1.5	J 42385- 216	J 42385- 211	J 42385-212	J 42385- 213	J 42385- 214	22.5 (0.885)	17.0 (0.669)
12- 14	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	26.5 (1.04)	19.0 (0.784)


Engine Block - Top View

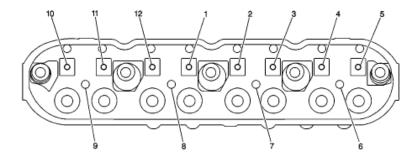

Cylinder Head

	Cylinder Head – Top View										
Hole	Thread Size	Insert	Drill	Counterbore Tool	Тар	Driver	Drill Depth – Maximum mm (in)	Tap Depth – Maximum mm (in)			
1–5	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	26.5 (1.04)	19.0 (0.784)			
6–9	M6 x 1.0	J 42385- 205	J 42385- 201	J 42385-202	J 42385- 203	J 42385- 204	20.05 (0.789)	16.05 (0.632)			
10- 12	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	26.5 (1.04)	19.0 (0.784)			


Cylinder Head - Top View

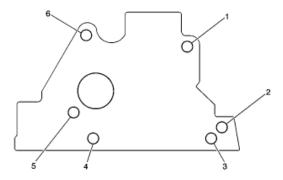

Cylinder Head

	Cylinder Head – End View										
Hole	Thread Size	Insert	Drill	Counterbore Tool	Тар	Driver	Drill Depth – Maximum mm (in)	Tap Depth – Maximum mm (in)			
1	M10 x 1.5	J 42385- 215	J 42385- 211	J 42385-212	J 42385- 213	J 42385- 214	28.0 (1.10)	20.0 (0.787)			
2	_	N/A	_	_	_	_	_	_			
3	M10 x 1.5	J 42385- 215	J 42385- 211	J 42385-212	J 42385- 213	J 42385- 214	28.0 (1.10)	20.0 (0.787)			
4	N/A	-	_	_	_	_	_	_			
5–6	M10 x 1.5	J 42385- 215	J 42385- 211	J 42385-212	J 42385- 213	J 42385- 214	28.0 (1.10)	20.0 (0.787)			


Cylinder Head - End View

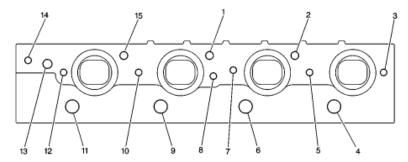

Cylinder Head

			Cylin	der Head – Exh	aust Man	ifold Decl	View	
Hole	Thread Size	Insert	Drill	Counterbore Tool	Тар	Driver	Drill Depth – Maximum mm (in)	Tap Depth – Maximum mm (in)
1–2	M10 x 1.5	J 42385- 215	J 42385- 211	J 42385-212	J 42385- 213	J 42385- 214	28.0 (1.10)	20.0 (0.787)
3	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	21.0 (0.826)	16.0 (0.629)
4	M14 x 1.25	-	-	-	١	١	-	-
5	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	21.0 (0.826)	16.0 (0.629)
6	M14 x 1.25	_	_	_	_	_	_	_
7–8	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	21.0 (0.826)	16.0 (0.629)
9	M14 x 1.25	_	_	_	_	_	_	_
10	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	21.0 (0.826)	16.0 (0.629)
11	M14 x 1.25	_	_	_	_	_	-	_
12	M8 x 1.25	J 42385- 210	J 42385- 206	J 42385-207	J 42385- 208	J 42385- 209	21.0 (0.826)	16.0 (0.629)
13	M12 x 1.5	_	_	_	-	-	-	_
14– 15	M10 x 1.5	J 42385- 215	J 42385- 211	J 42385-212	J 42385- 213	J 42385- 214	28.0 (1.10)	20.0 (0.787)

Cylinder Head - Exhaust Manifold Deck View

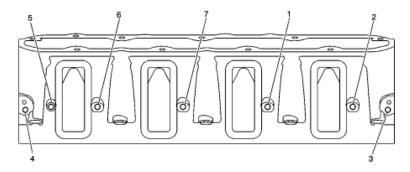

Cylinder Head

Cylinder Head – Intake Manifold Deck View								
Hole	Thread Size	Insert	Drill	Counterbore Tool	Тар	Driver	Drill Depth – Maximum mm (in)	Tap Depth – Maximum mm (in)
1–2	M6 x 1.0	J 42385- 205	J 42385- 201	J 42385-202	J 42385- 203	J 42385- 204	Thru	Thru
3–4	M6 x 1.0	J 42385- 205	J 42385- 201	J 42385-202	J 42385- 203	J 42385- 204	22.5 (0.885)	15.0 (0.688)
5–7	M6 x 1.0	J 42385- 205	J 42385- 201	J 42385-202	J 42385- 203	J 42385- 204	Thru	Thru

Cylinder Head - Intake Manifold Deck View