
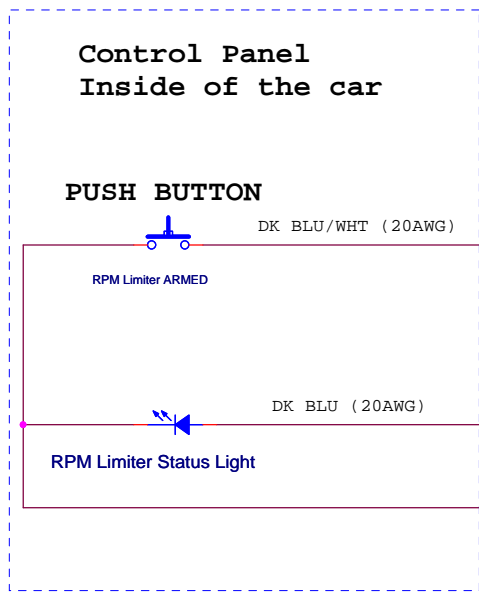


**For F-Body '99 & UP (new PCM)
With Nitrous Suspend**

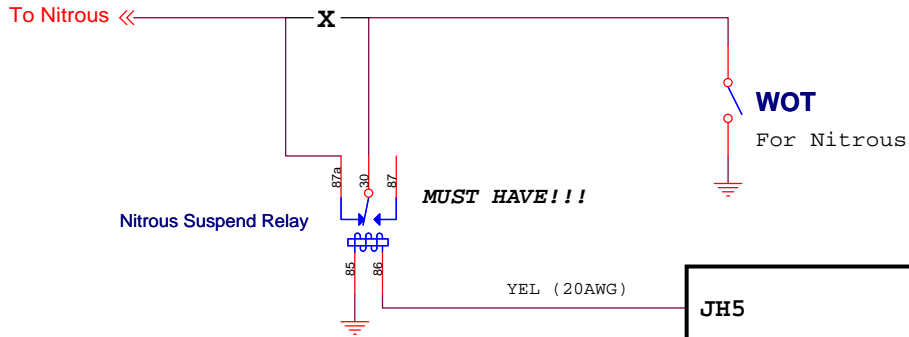

S Y N E R G Y

ADJUSTABLE STUTTER SWITCH

AST-1

SETTING RANGE:
2000 ~ 9000 RPM

JH5

JH8

JH6 *Current Limited to 20mA*

JH23

JH23

PCM	
JH15	PPL (20AWG) C2-26 (RED) Ignition Control #1
JH16	RED/WHT (20AWG) C2-67 (RED) Ignition Control #2
JH17	LT BLU (20AWG) C2-69 (RED) Ignition Control #3
JH18	DK GRN/WHT (20AWG) C2-29 (RED) Ignition Control #4
JH19	DK GRN (20AWG) C2-68 (RED) Ignition Control #5
JH20	LT BLU/WHT (20AWG) C2-28 (RED) Ignition Control #6
JH21	RED (20AWG) C2-27 (RED) Ignition Control #7
JH22	PPL/WHT (20AWG) C2-66 (RED) Ignition Control #8
JH7	WHT (20AWG) C2-10 (RED) Engine Speed (TACH)
JH9	GRY (20AWG) C1-35 (BLU) Clutch Switch
JH14	PNK (20AWG) C1-19 (BLU) PCM Ignition Supply

Scale to 1:0.25 for Inside label
Offset x= 0,5, Y= 0.5
Paper size: 4x6

Advanced Electronics Solutions Inc.		
Title	Adjustable Stutter Switch AST-1	
Size B	Document Number	Rev
	nwl-1.dsn	B
Date:	Friday, May 18, 2007	Sheet 1 of 3