


# Vehicle OBDII Connector Pin Assignments

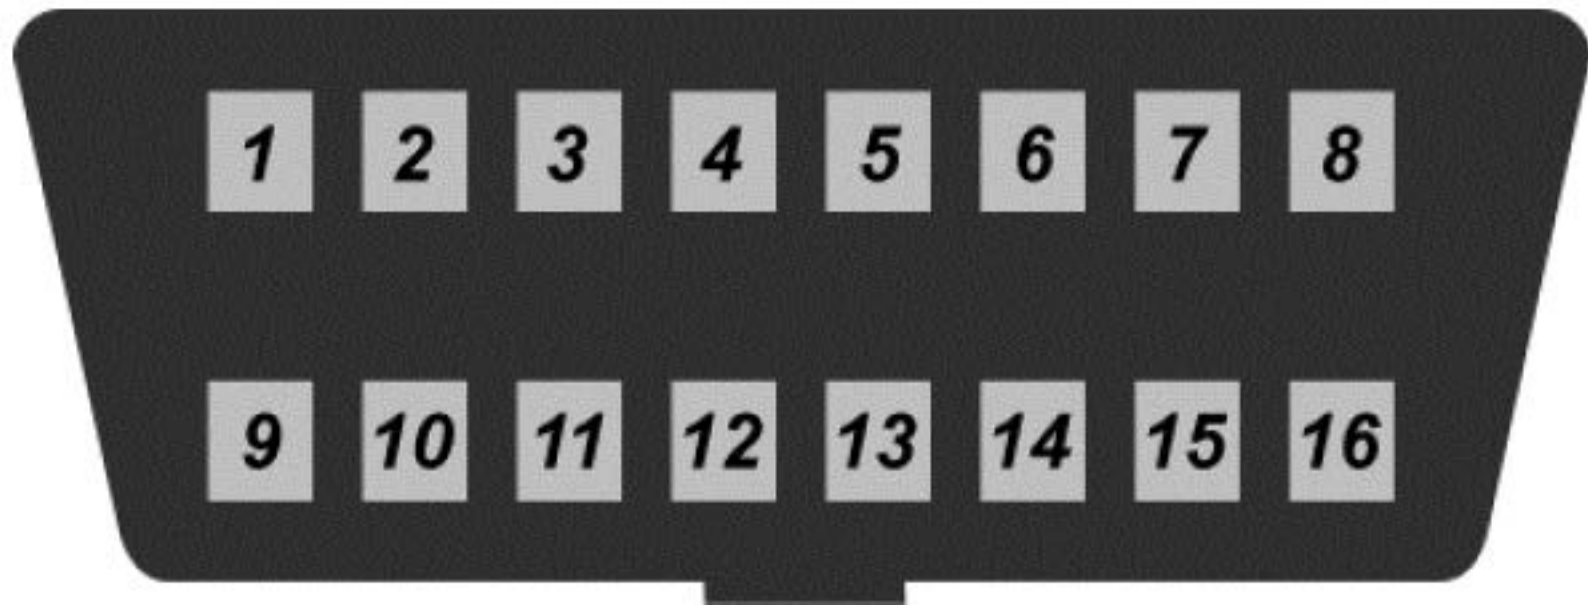

Vehicle OBDII Socket  
SAE J1962 Female

1	GM CAN (Low-speed, Single-wire)	9	GM ALDL (OBD-I 8192bps)
2	SAE J1850-VPW Positive	10	SAE J1850-VPW Negative
3	Discretionary *	11	Discretionary *
4	Chassis Ground	12	Discretionary *
5	Signal Ground	13	Discretionary *
6	ISO 15765-4 CAN High	14	ISO 15765-4 CAN Low
7	ISO 9141-2 & ISO 14230-4 K-Line	15	ISO 9141-2 & ISO 14230-4 L-Line
8	Discretionary *	16	Unswitched Battery Power